Superveloce 800 US Fender Eliminator Instructions

Need help with installations? Contact us at install@abmoto.store

ABMOTO.STORE

ABMOTO.US

@AB_MOTORWORKS

Rear Plate Bracket Removal

1. **(Removal of the rear wheel is not necessary but provides more access to remove the right side pinch bolt.)** Remove the rear wheel nut and adjust wheel to the side to have access to the three bolts that hold on the rear license plate bracket. Be sure to place cloth over the rear wheel to prevent scratches from the exhaust. ***(Figure 1 and 2)***
2. Remove the 2 screws holding on the small wire cover where the signal and license light wires connect. Disconnect the wires. ***(Figure 3 & 4)***
3. Remove the 3 bolts holding on the license plate bracket and remove the bracket. Install the included titanium pinch bolts on the swingarm. ***(Figure 3)***
4. Remove the 3 screws holding on the plastic wire cover that runs along the swingarm. Remove signal and license light wire. Reinstall with rear brake and speed sensor wire. ***(Figure 5)***
5. Cut plastic zip tie located behind rear shock to free the signal and license light wire. ***(Figure 6)***

(Removing the clutch cover is not necessary but does make it easier to re-route the signal/license light wire.)

6. Remove the 4 clutch cover bolts. ***(Figure 7)***
7. Remove the 2 screws on the right-side belly pan. Remove toggle screw on the bottom near the oil cooler to loosen the belly pan.
8. Unhook the wire connector from the tab and remove the screw holding on the tab. The clutch cover should now be able to be removed. ***(Figure 8)***
9. Pull the signal wire through to the right side of the bike. Remove the rubber clamp. ***(Figure 9)***
10. Remove rear seat pillion and main seat. Unbolt the rear right plastic fender by undoing the 4 bolts on top and 3 along the bottom right side. ***(Figure 10)***
11. Undo the 2 rubber clamps and run the signal/license light wire to the rear compartment. ***(Figure 11)***
12. Remove OEM license plate light, signals and reflector from the stock bracket housing if any are being reused on the new fender eliminator.

Fender Eliminator Assembly and Install

1. Unbolt the 2 screws holding on the rear light. Disconnect the rear light and remove the connector from the frame tab. ***(Figure 12 & 13)***
2. Remove the 4 metal spacers and 2 rubber grommets. ***(Figure 14)***
   If using the tucked bracket skip to step 8
3. Install the included license light on the license light bracket and slide the wire through the plastic wire cover and license bracket as shown in ***Figure 15***
4. Slide the license bracket into the wire cover slot and secure the license bracket with the two provided M5 countersunk screws. **(Blue Loctite recommended)** ***(Figure 16)***
5. Place the license light bracket into the wire cover slot. ***(Figure 17)***
6. Secure the bottom wire cover using the four provided M3 countersunk screws. ***(Figure 18)***
7. Place the taillight into the signal, running the wire through the center whole of the signal and bike frame.. Run the license light wire through the bottom slot of the signal between the bottom fairing and billet signal. ***(Figure 19)***
8. Place the signal into the two holes where the rubber grommets were removed in step 2. Secure the signal using a 16mm socket to tighten the two provided nuts. **(Fitment is tight. Use the two nuts to pull the two post all the way through so that the signal is flush with the frame.)** ***(Figure 20)***
9. Using the included black M5x25mm screws, secure the taillight. ***(Figure 21)***

Superveloce 800 US Fender Eliminator Instructions

Need help with installations? Contact us at install@abmoto.store

10. For the tucked license bracket, install the license light onto the license bracket and slide the wire through the regulator hole. ***(Figure 22)*** Remove the two M4 bolts from the bottom plastic fairing and install the license bracket with the provided spacers and M4 bolts. ***(Figure 22 & 23)***

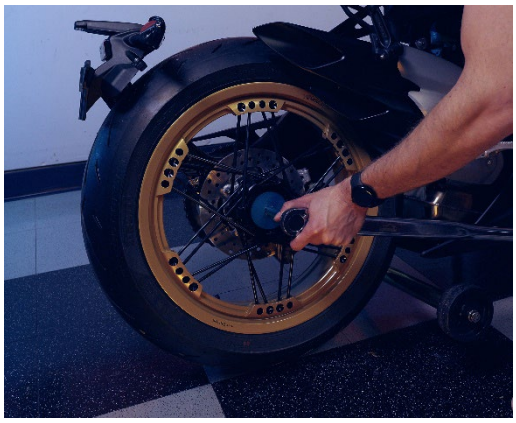


Figure 1

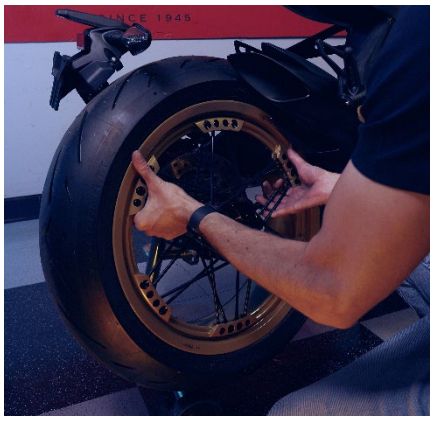


Figure 2

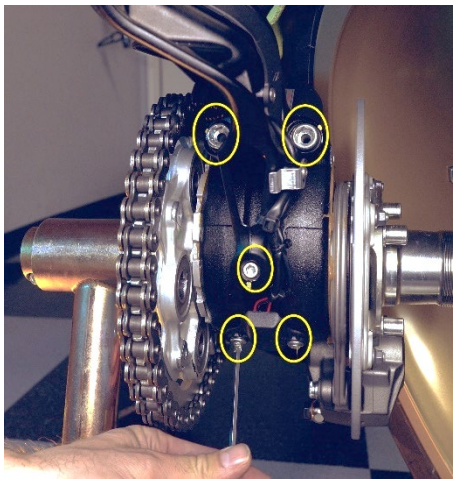


Figure 3

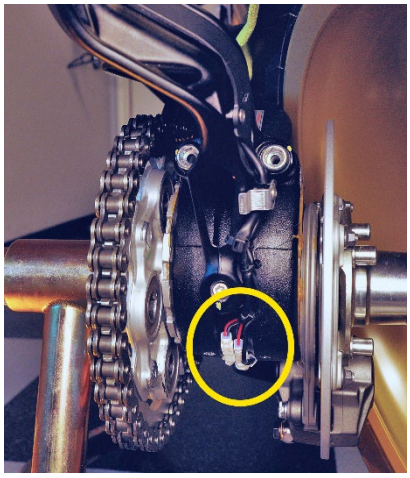


Figure 4

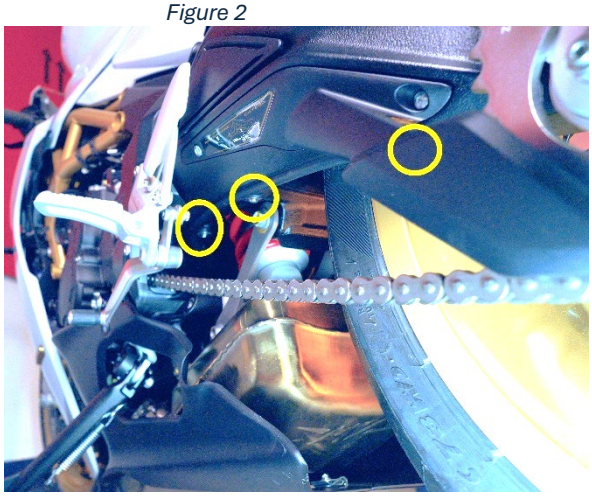


Figure 5

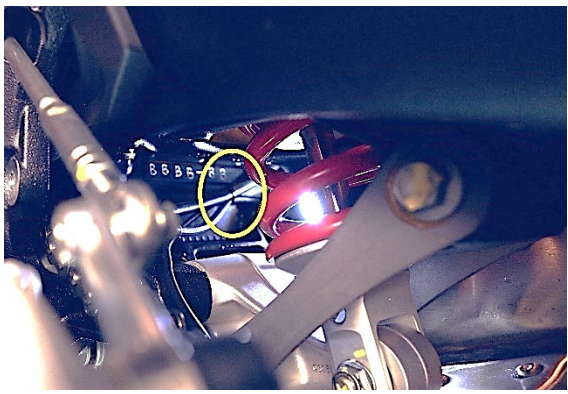


Figure 6

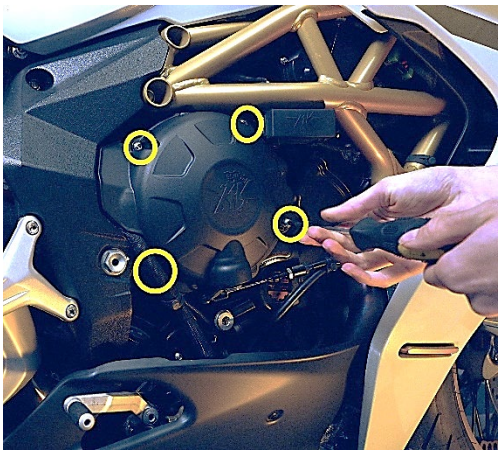


Figure 7

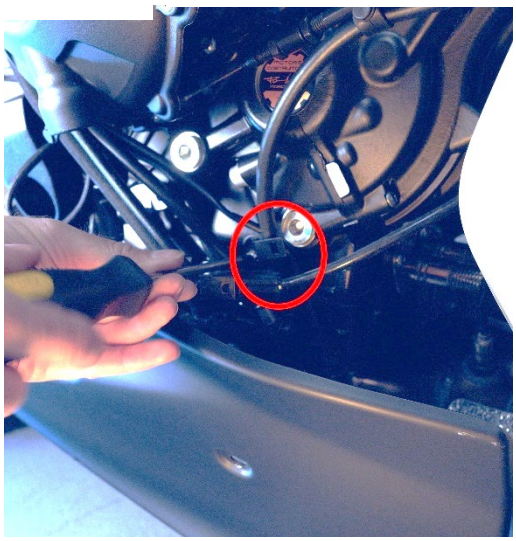


Figure 8

Superveloce 800 US Fender Eliminator Instructions

Need help with installations? Contact us at install@abmoto.store

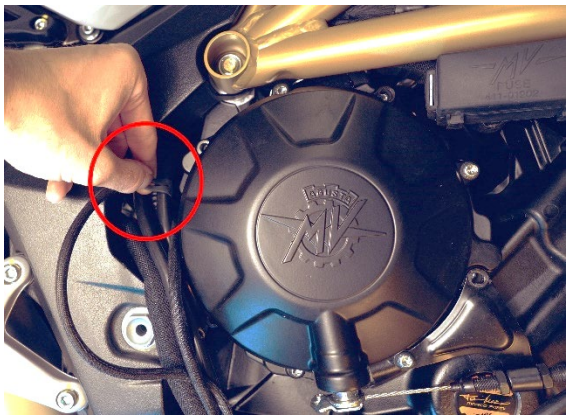


Figure 9

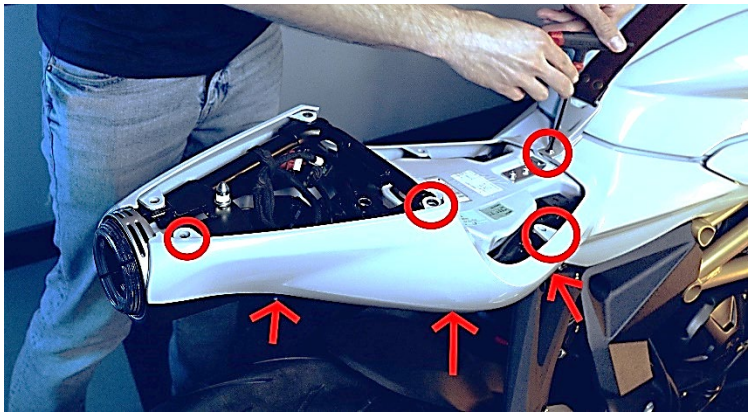


Figure 10



Figure 11

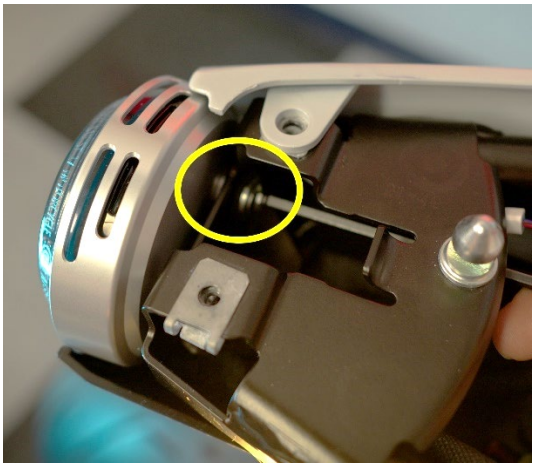


Figure 12

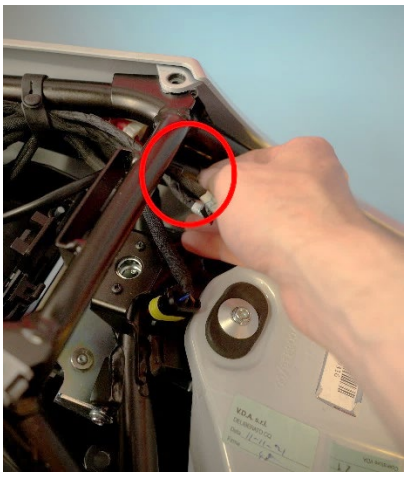


Figure 13

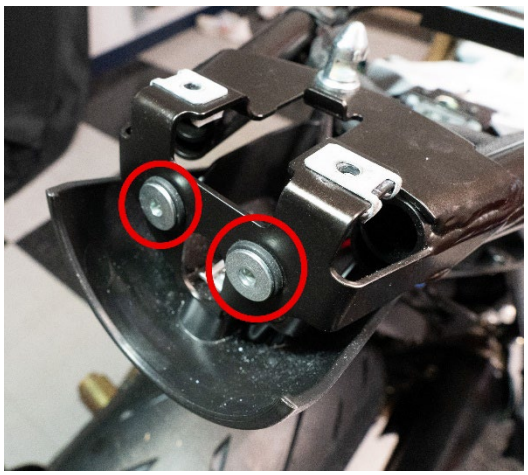


Figure 14



Figure 15

Superveloce 800 US Fender Eliminator Instructions

Need help with installations? Contact us at install@abmoto.store

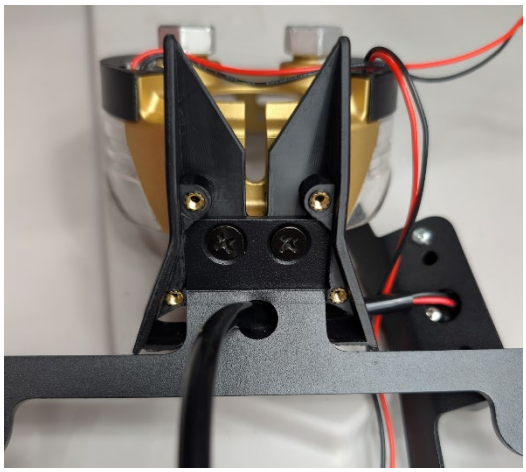


Figure 16

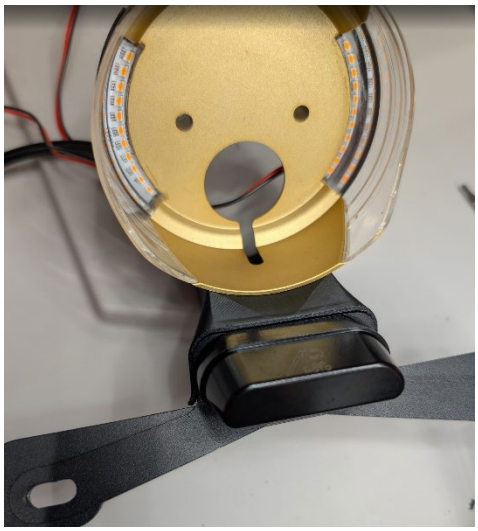


Figure 17

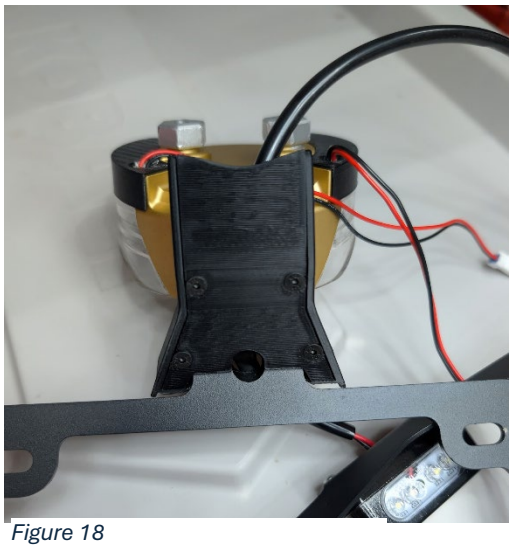


Figure 18



Figure 19

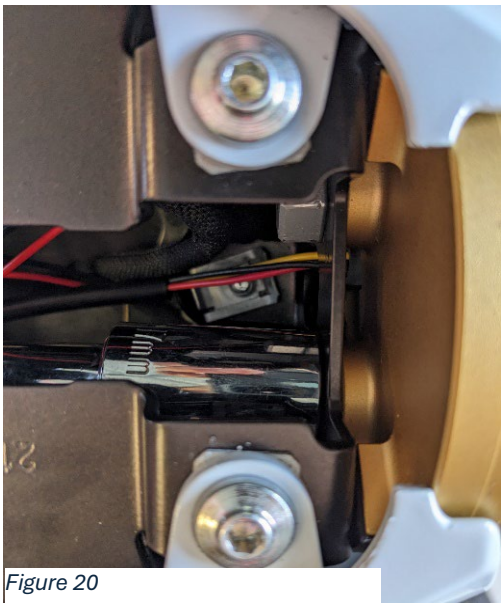


Figure 20



Figure 21



Figure 22



Figure 23