Superveloce EU Fender Eliminator Instructions

Need help with installations? Contact us at install@abmoto.store

ABMOTO.STORE

ABMOTO.US

@AB_MOTORWORKS

Rear Plate Bracket Removal

1. **(Removal of the rear wheel is not necessary, but provides more access to remove the right side pinch bolt.)** Remove the rear wheel nut and adjust wheel to the side to have access to the three bolts that hold on the rear license plate bracket. Be sure to place cloth over the rear wheel to prevent scratches from the exhaust. ***(Figure 1 and 2)***
2. Remove the 2 screws holding on the small wire cover where the signal and license light wires connect. Disconnect the wires. ***(Figure 3 & 4)***
3. Remove the 3 bolts holding on the license plate bracket and remove the bracket. Install the included titanium pinch bolts on the swingarm. ***(Figure 3)***
4. Remove the 3 screws holding on the plastic wire cover that runs along the swingarm. Remove signal and license light wire. Reinstall with rear brake and speed sensor wire. ***(Figure 5)***
5. Cut plastic zip tie located behind rear shock to free the signal and license light wire. ***(Figure 6)***

(Removing the clutch cover is not necessary but does make it easier to re-route the signal/license light wire.)

6. Remove the 4 clutch cover bolts. ***(Figure 7)***
7. Remove the 2 screws on the right-side belly pan. Remove toggle screw on the bottom near the oil cooler to loosen the belly pan.
8. Unhook the wire connector from the tab and remove the screw holding on the tab. The clutch cover should now be able to be removed. ***(Figure 8)***
9. Pull the signal wire through to the right side of the bike. Remove the rubber clamp. ***(Figure 9)***
10. Remove rear seat pillion and main seat. Unbolt the rear right plastic fender by undoing the 4 bolts on top and 3 along the bottom right side. ***(Figure 10)***
11. Undo the 2 rubber clamps and run the signal/license light wire to the rear compartment. ***(Figure 11)***
12. Remove OEM license plate light, signals and reflector from the stock bracket housing if any are being reused on the new fender eliminator.

Fender Eliminator Assembly and Install

1. Slide the extension arm over the rear light surround and screw in the 2 M5 x 16mm screws. ***(Figure 12)***
2. Install the license plate bracket with the 2 M6 screws. ***(Figure 13)***
3. Install the license light with the 2 M3 screws. ***(Figure 14)***
4. Install the signals into the signal covers. Use the provided plastic spacers if needed to orientate the signal in the correct direction. ***(Figure 14)***
5. Run the wires for each signal through the extension bracket and install the signal covers with the 2 M4 screws. Secure the wires down with the provided plastic wire holder. (**Figure 16, 17)**
6. Unbolt the 2 screws holding on the taillight. Disconnect the taillight and remove from the frame tab. ***(Figure 18 & 19)***
7. Remove the 4 metal spacers and 2 rubber grommets. ***(Figure 20)***
8. Place the taillight into the billet taillight surround and run the taillight wire through the hole in the rear subframe. Run the wires from the license light and indicators into the rear of the bike, aligning them with the slot cut out of the bottom of the billet taillight surround so that there is no binding or pinching of them between the bottom plastic fender and taillight surround. ***(Figure 21)***
9. Secure the fender eliminator using a 16mm socket to tighten down the two nuts. (**Do not overtighten)** ***(Figure 22***)

Superveloce EU Fender Eliminator Instructions

Need help with installations? Contact us at install@abmoto.store

10. Use the screws that were removed in step 6 to secure the taillight. ***(Figure 23)***
11. If using the reflector, secure it to the reflector arm. Use the two M6 countersunk screws and M6 nuts to attach it to the license plate bracket. ***(Figure 24)***

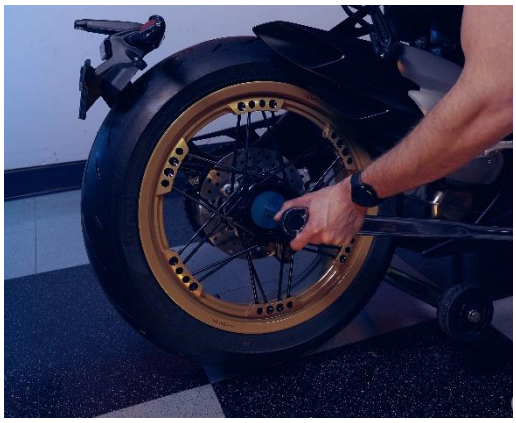


Figure 1

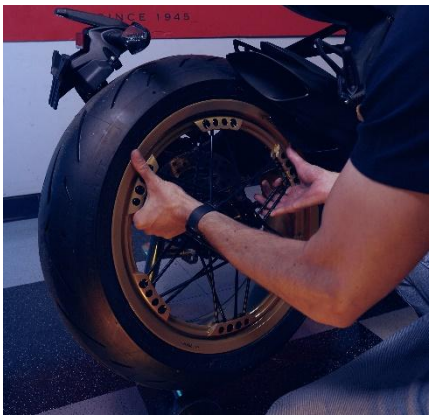


Figure 2

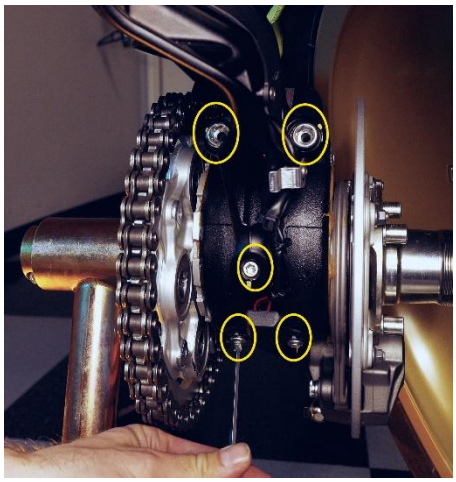


Figure 3

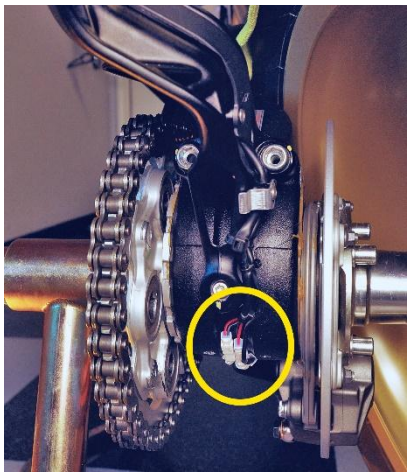


Figure 4

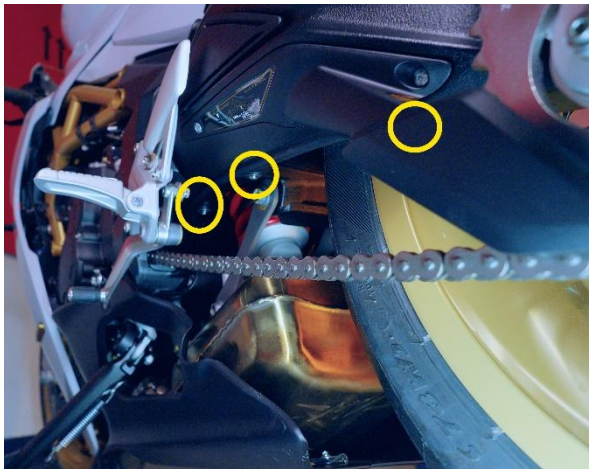


Figure 5

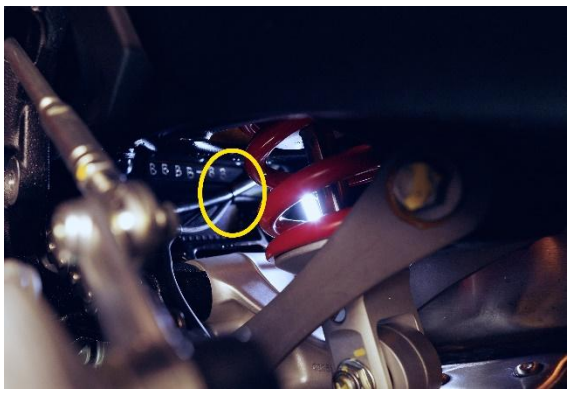


Figure 6

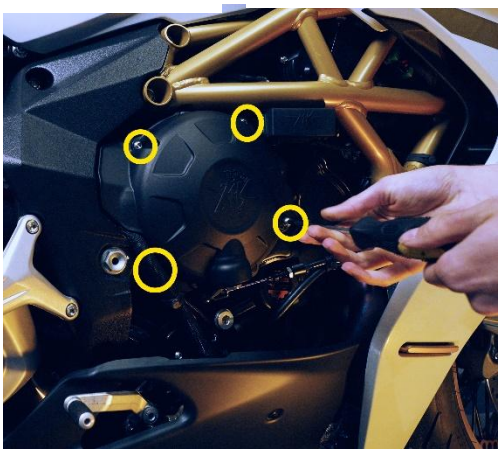


Figure 7

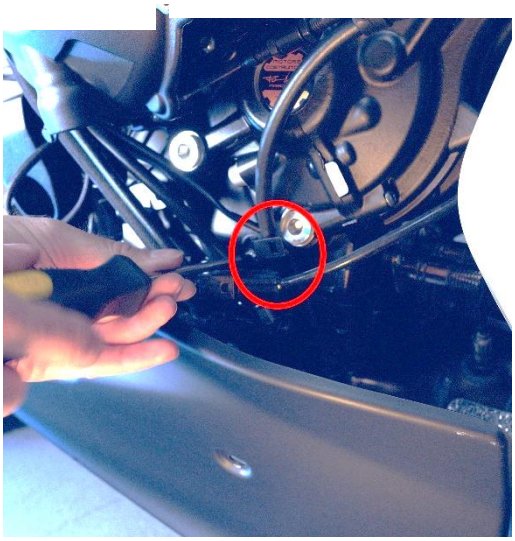


Figure8

Superveloce EU Fender Eliminator Instructions

Need help with installations? Contact us at install@abmoto.store

ABMOTO.STORE

ABMOTO.US

@AB_MOTORWORKS

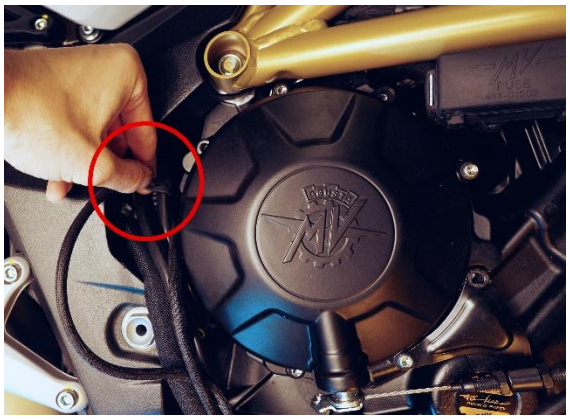


Figure 9

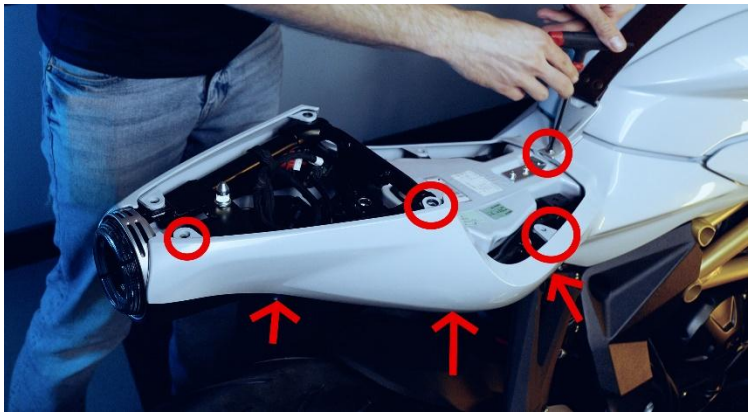


Figure 10



Figure 11



Figure 12



Figure 13

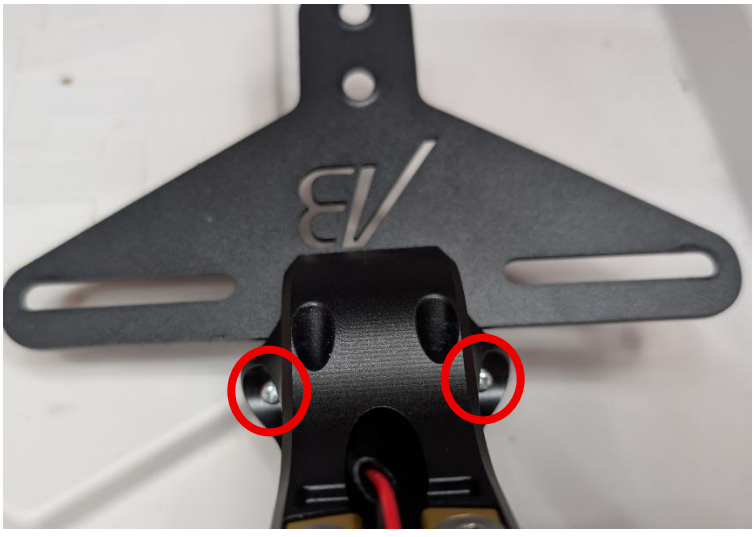


Figure 14



Figure 15

Superveloce EU Fender Eliminator Instructions

Need help with installations? Contact us at install@abmoto.store



Figure 16



Figure 17

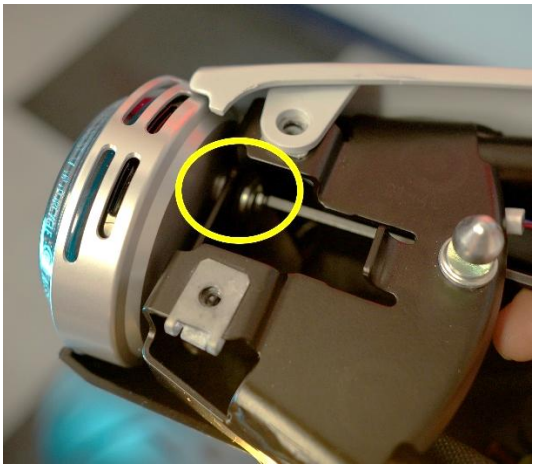


Figure 18

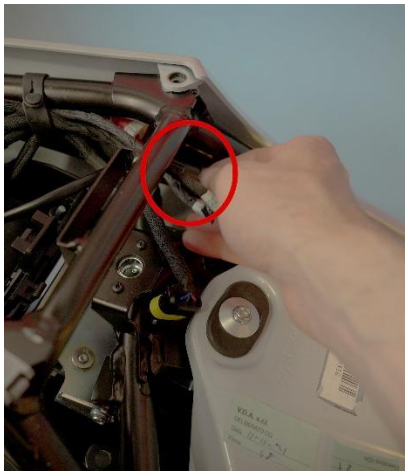


Figure 19

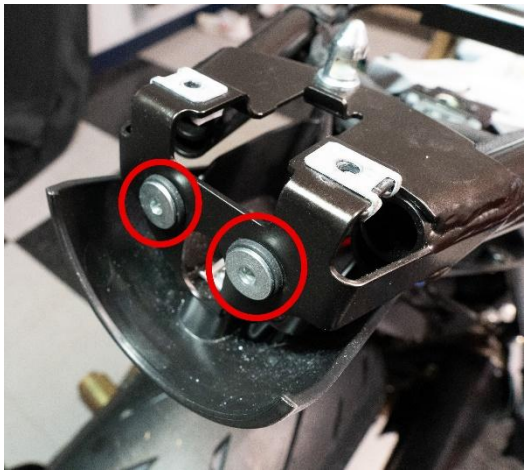


Figure 20



Figure 21

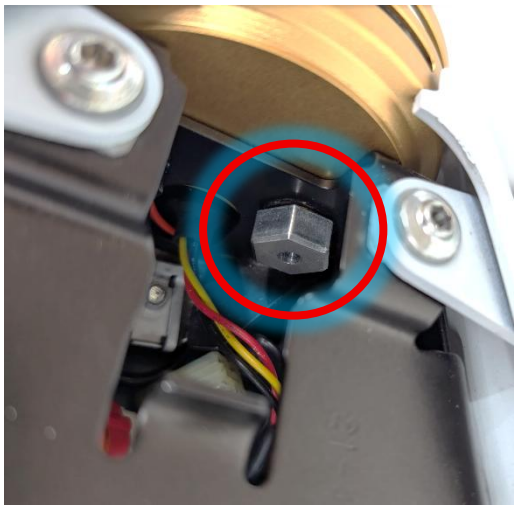


Figure 22

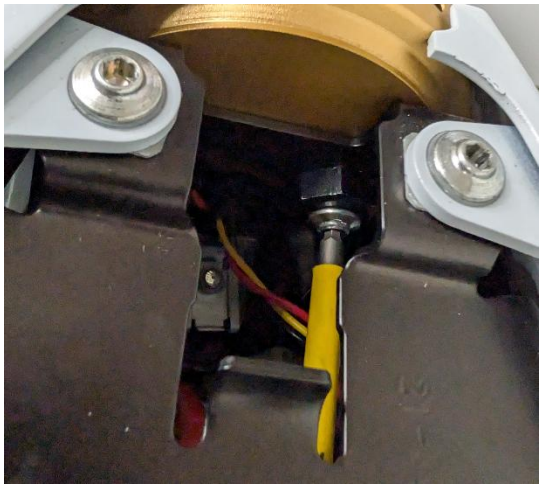


Figure 23

Superveloce EU Fender Eliminator Instructions

Need help with installations? Contact us at install@abmoto.store



Figure 24